


Balanced Core:	3 Plies of 2mm veneer (Long grain/cross grain/long grain)
Cut:	Rotary Cut
Core Bond:	PVA Glue
Top Layer:	2mm face Select & Better (can be sanded and refinished at least 1x)
Thickness:	1/4"
Width:	6.65"
Length:	47.75"
Plank Size:	2.2 Sq Ft
Installation:	Guiding T&G with pre-applied VacuuBond [®]
Edge:	4-sided Micro Bevel
Finish:	WearMax Commercial – Water Resistant. (Top 8 coats) (Bottom 3 Coats)
Carton:	12 Planks/box = 26 Sq Ft
Weight:	1 Carton = 28 lbs
Pallet:	40 Cartons/1,056 Sq Ft/1,120 lbs
Truckload:	39 Pallets/43,680 Sq Ft
Installation Grade:	Above, on, below grade
Radiant Heat:	Approved for installation
VacuuBond[®] Acoustic Testing:	IICASTM E492/E989 (70 dB), STCASTM E336/E413 (62 dB)
Residential Warranty:	Limited Lifetime
Pull Test (For VacuuBond[®] bond strength):	<ul style="list-style-type: none"> • Hardwood on plywood with primer (105.3 psi) • Hardwood on OSB with primer (87.6 psi) • Hardwood on concrete with primer (89.6) • Hardwood on membrane (90 psi)

MADE IN THE USA
Limited Lifetime Warranty

Approved Installation:

Above Grade	✓
At Grade	✓
Below Grade	✓
Over Hydronic Radiant Heat	✓

Guided Tongue & Groove Edge

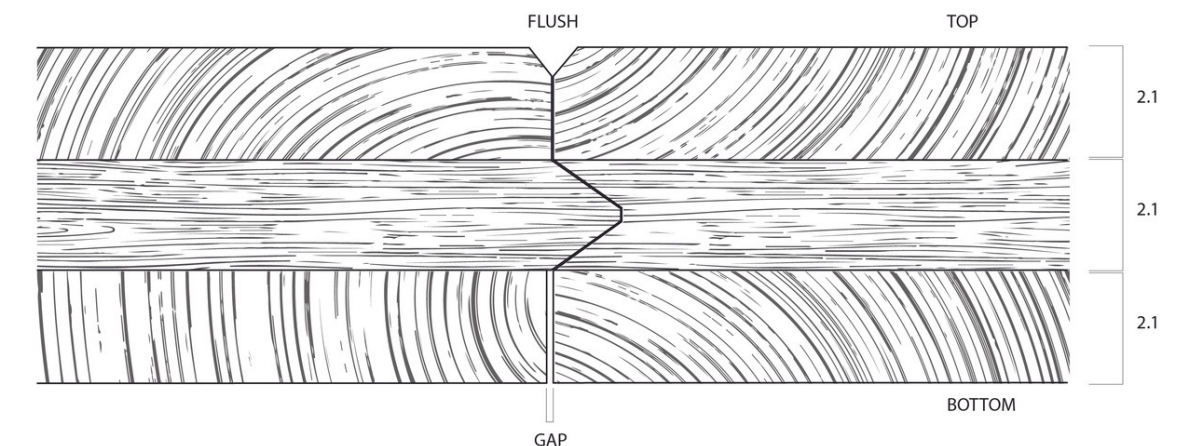

Three opposing plies for stability